



Laser-Induced Damage Threshold (LIDT) Measurement Report

ISO21254-2: S-on-1 Test Procedure

Sample: R14006-8

Request from:

STFC RAL
Rutherford Appleton Laboratory
Harwell Oxford
Didcot OX11 0QX
United Kingdom

Contact person:

Maria Stefania De Vido

Testing institute:

Lidaris Ltd.
Saulėtekio al. 10,
LT-10223, Vilnius, Lithuania, EU

Tester/date:

E. Pupka / 2015-06-09

Specimen

Name of sample:

R14006-8

Type of specimen:

Yb:YAG, IAD dielectric coating

Storage, cleaning:

Plastic box, wrapped in paper for optics

Test specification

First harmonic of pulsed Nd:YAG InnoLas Laser: SpitLight Hybrid laser ($\lambda = 1064$ nm, linear polarization, pulse duration 10.2 ns), $\lambda/2$ plate combined with additional polarizer attenuator, online scattered light damage detection, offline inspection of damage detection using Nomarski microscopy (100x).

Laser parameters used for testing

Wavelength:	1064 nm
Angle of incidence:	0 deg.
Polarization state:	linear
Pulse repetition frequency:	100 Hz
Spatial beam profile in target plane:	TEM ₀₀
Longitudinal beam profile:	Single mode (SLM)
Beam diameter in target plane _(1/e²) :	250.0 ± 5.4 μm (average from 64 pulses)
Pulse duration:	10.2 ns

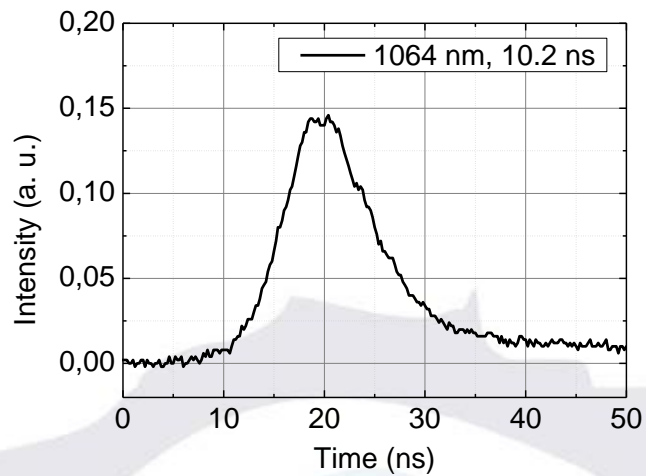
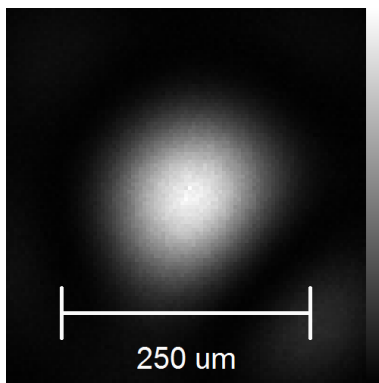


Fig. 1. Spatial beam profile in target plane (left) and oscilloscope curve (right).

Test procedure:

Number of sites per specimen:

Arrangement of test sites:

Minimum distance between sites:

Damage detection:

Storage of the specimen:

Test environment:

Cleaning:

Definition of LIDT:

S-on-1 test

209

equally spaced

875 μm

Scattered light diode

Manufacturer's packaging,
normal laboratory conditions

Industrial environment

Dust blown off with clean air

Nonlinear fit to 0% of damage Probability

Test result:

Table 1. Summarized LIDT's for sample R14006-8.

Test mode	Threshold - front surface, J/cm ²	Threshold - rear surface, J/cm ²
10-on-1	8.62 ≤ 11.42 ≤ 13.60	15.99 ≤ 18.65 ≤ 21.12
1000-on-1	5.76 ≤ 7.52 ≤ 8.83	13.01 ≤ 15.59 ≤ 18.02

Measured at LIDARIS 2015-06-09

www.lidarisis.com

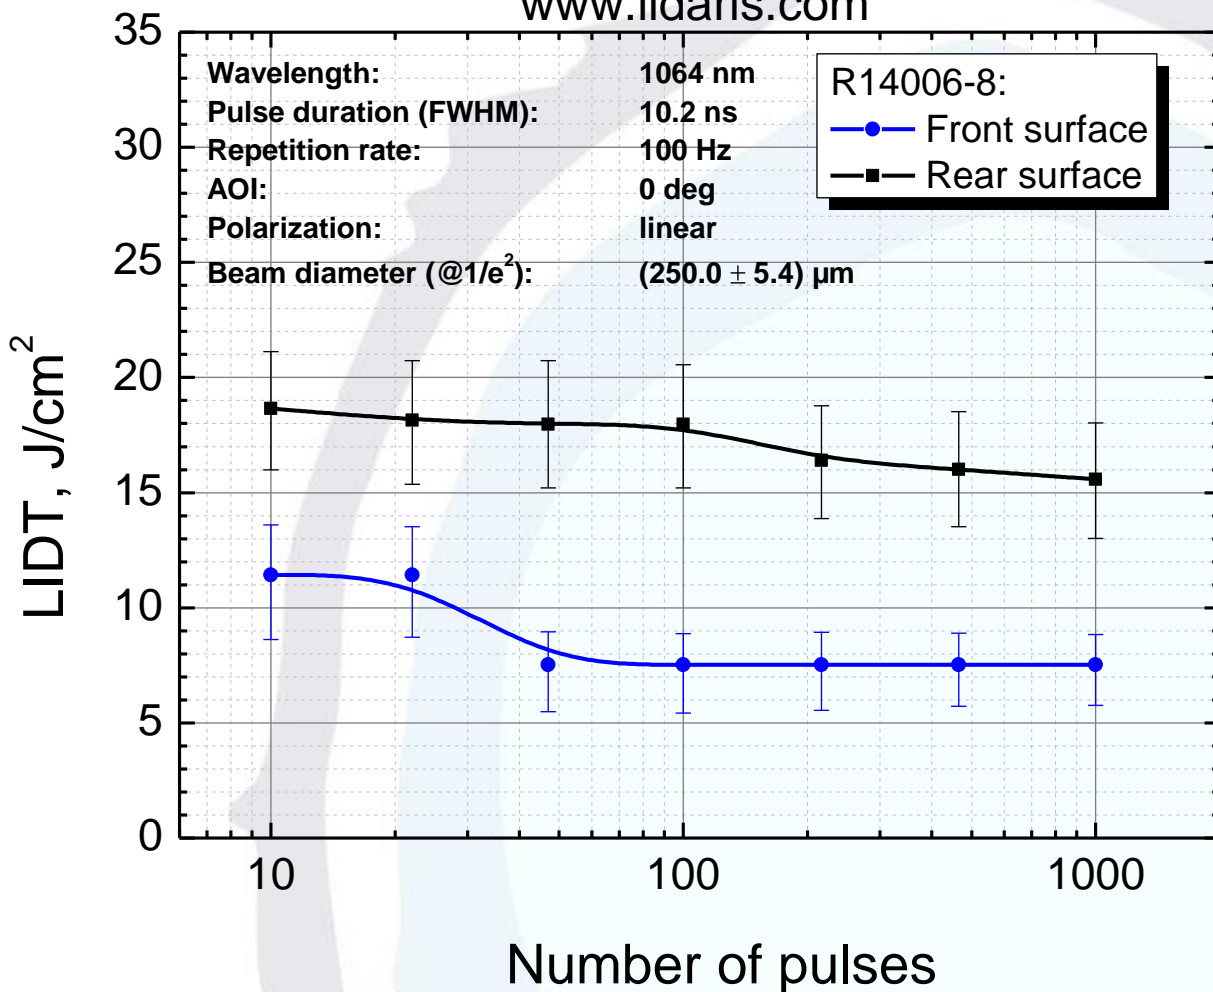
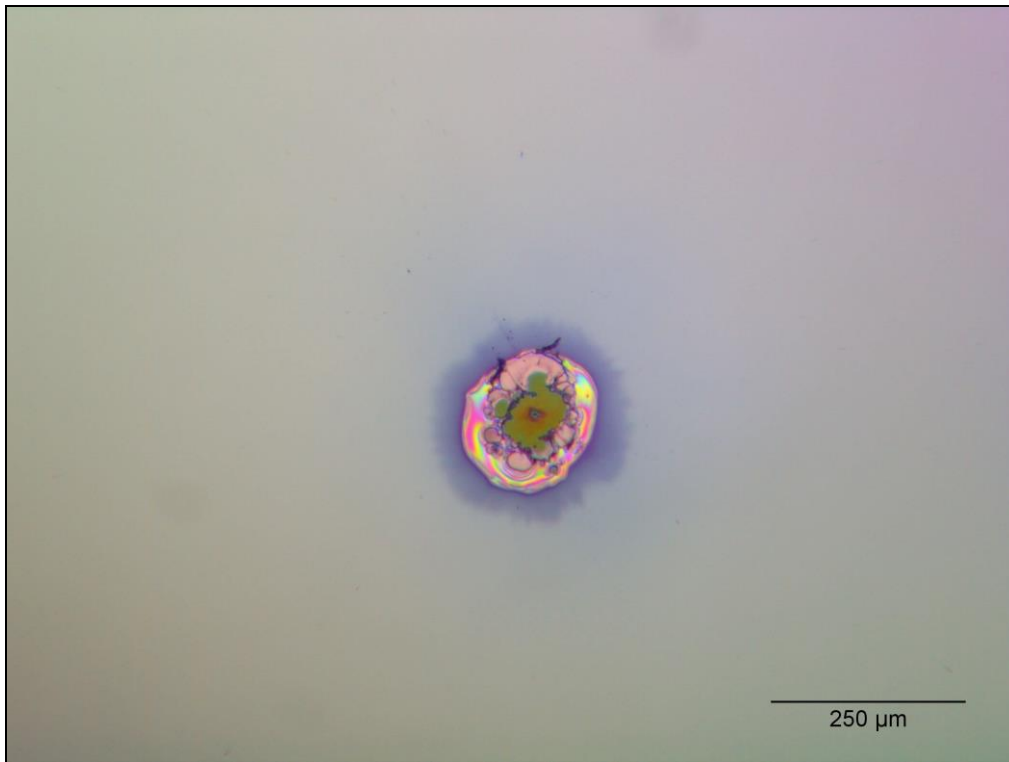
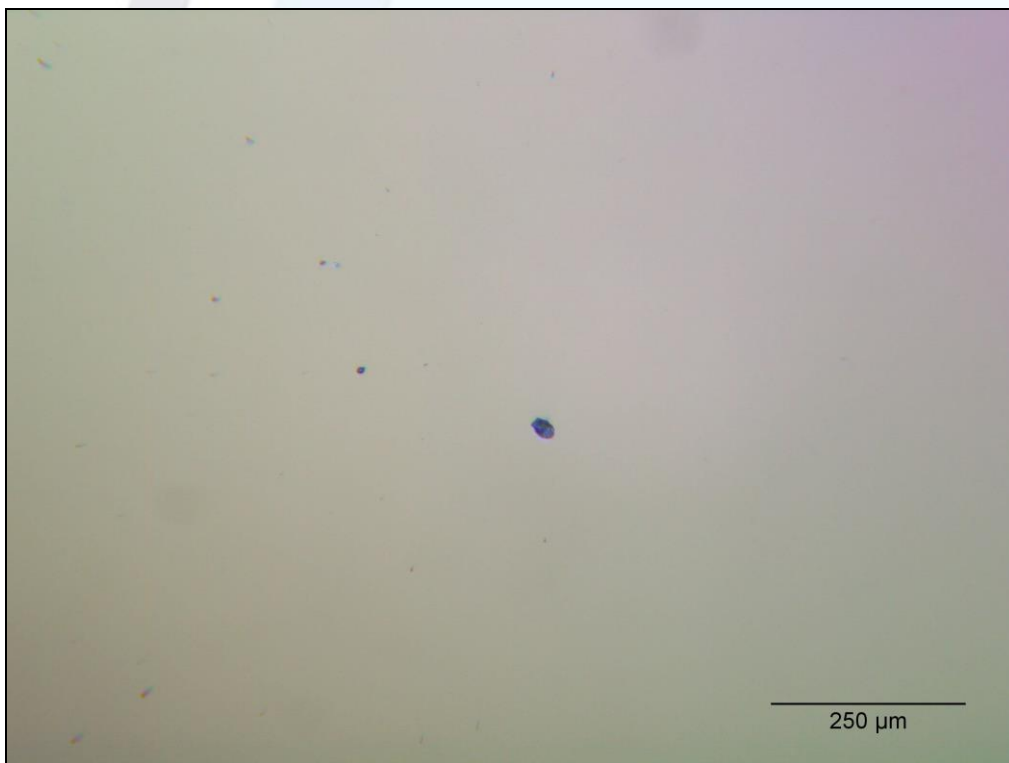


Fig. 2. Characteristic damage curve.

Typical damage morphology:



**Fig. 3. Typical front surface damage morphology
(Energy density 30.41 J/cm^2 , damage after 8 pulses)**



**Fig. 4. Typical front surface damage morphology
(Energy density 7.98 J/cm^2 , damage after 1000 pulses)**

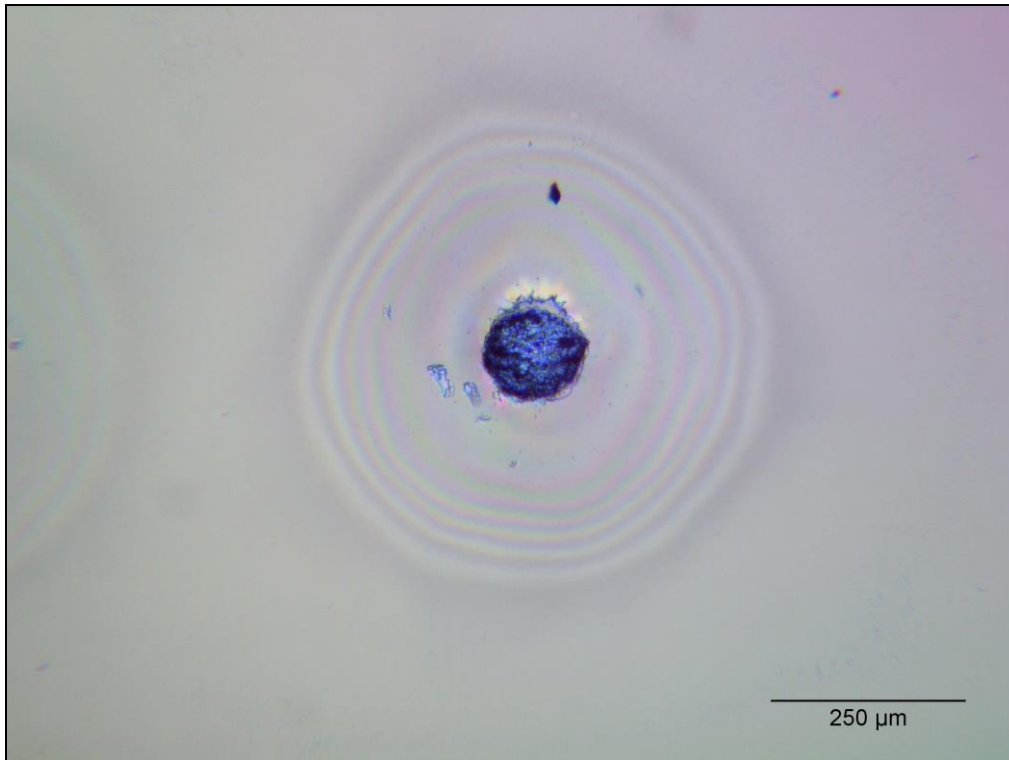


Fig. 5. Typical rear surface damage morphology
(Energy density 30.52 J/cm^2 , damage after 5 pulses)

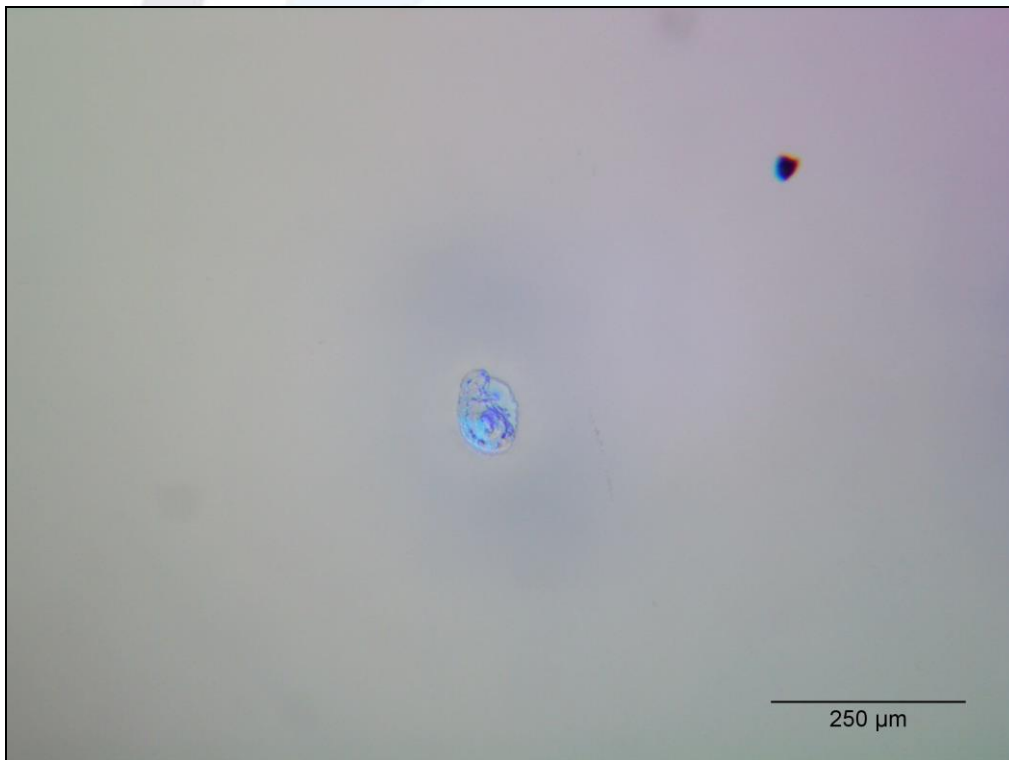


Fig. 6. Typical rear surface damage morphology
(Energy density 18.24 J/cm^2 , damage after 805 pulses)